



Advances in Artificial Intelligence Applications

Alexander Gelbukh
Raúl Monroy
(Eds.)



Vol. 17

RESEARCH ON COMPUTING SCIENCE

Advances in Artificial Intelligence Applications

Alexander Gelbukh
Raúl Monroy
(Eds.)

Vol. 17



Artificial Intelligence is a branch of computer science aimed at providing the computer elements of human-like behavior such as ability to think, learn by example, doubt, act, see, and speak. In addition to creating human-like-behaving machines, modern artificial intelligence provides a very powerful platform for solving a wide range of super-complex optimization problems.

This volume presents 26 carefully selected original research papers on application of artificial intelligence techniques to practical real-life problems. The papers are structured into eight thematic fields:

- Economy, Commerce, and Education;
- Information Systems and Data Mining;
- Information Security and Infrastructure;
- Anti-Spam filtering and Email Virus Detection;
- Image processing and Human-Computer Interaction;
- Data compression;
- Robotics;
- Route Planning.

The volume is prepared in collaboration with Mexican Society for Artificial Intelligence (SMAIA).

ISSN: 1665-9899



INSTITUTO POLITÉCNICO NACIONAL



**Advances in Artificial Intelligence
Applications**

Research on Computing Science

Series Editorial Board Comité Editorial de la Serie

Editors-in-Chief:

Editors-in-Chief:
Juan Humberto Sossa Azuela (Mexico)
Gerhard Ritter (USA)
Jean Serru (France)
Ulises Cortes (Spain)

Associate Editors:

Editors-Associates:
Jesus Angulo (France)
Jihad El-Sana (Israel)
Jesus Figueroa (Mexico)
Alexander Gelbukh (Russia)
Ioannis Katerinis (USA)
Sergei Levaehine (Russia)
Perros Maragos (Greece)
Julian Padget (UK)
Mateo Valero (Spain)

Editorial Coordination:

Editorial Coordination:
Blanca Miranda Valencia

Formatting:

Formatting:
Silena Torres Ramos

Research on Computing Science es una publicación trimestral, de circulación internacional, editada por el Centro de Investigación en Computación del IPN, para dar a conocer los avances de investigación científica y desarrollo tecnológico de la comunidad científica internacional. **Volumen 17** Noviembre, 2005. Tiraje: 500 ejemplares. *Certificado de Reserva de Derechos al Uso Exclusivo del Título* No. 04-2004-062613250000-102, expedido por el Instituto Nacional de Derecho de Autor. *Certificado de Licitud de Título* No. 12897. *Certificado de Licitud de Contenido* No. 10470, expedidos por la Comisión Calificadora de Publicaciones y Revistas Ilustradas. El contenido de los artículos es responsabilidad exclusiva de sus respectivos autores. Queda prohibida la reproducción total o parcial, por cualquier medio, sin el permiso expreso del editor, excepto para uso personal o de estudio haciendo cita explícita en la primera página de cada documento. Se usó la imagen obtenida de la siguiente dirección, para el diseño de la portada: www.absolutewallpapers.com/wallpapers/3dwallpapers/fractal/fractal_5.jpg. Impreso en la Ciudad de México, en los Talleres Gráficos del IPN - Dirección de Publicaciones, Tres Guerras 27, Centro Histórico, México, D.F. Distribuida por el Centro de Investigación en Computación, Av. Juan de Dios Bátiz S/N, Esq. Av. Miguel Ohón de Mendizábal, Col. Nueva Industrial Vallejo, C.P. 07738, México, D.F. Tel. 57 29 60 00, ext. 56571.

Editor Responsable: Juan Humberto Sossa Azuela, RFC SOAJ560723

Research on Computing Science is published by the Center for Computing Research of IPN, Volume 17, November, 2005. Printing 500. The authors are responsible for the contents of their articles. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without prior permission of Centre for Computing Research. Printed in Mexico City, November, 2005, in the IPN Graphic Workshop - Publication Office.

Volume 17

Volumen 17

Advances in Artificial Intelligence Applications

Volume Editors:

Editores del Volumen

Alexander Gelbukh
Raul Moroy

Instituto Politécnico Nacional
Centro de Investigación en Computación
México 2005



Artificial Intelligence is a branch of computer science aimed at providing the computer elements of human-like behavior such as ability to think, learn by example, doubt, act, see, and speak. Since its beginning artificial intelligence research has been influenced and inspired by nature—in the first place, by the way human beings accomplish such tasks. Recently, the repertoire of artificial intelligence methods was enriched by other naturally inspired optimization techniques, such as genetic algorithms, swarm intelligence, or ant colony optimization. In addition to creating human-like behaving machines, modern artificial intelligence provides a very powerful platform for solving a wide range of super-complex optimization problems.

This volume presents original research papers on application of artificial intelligence techniques to practical real-life problems, from economy and education to creating of physical intelligent robots. It is structured into eight thematic fields representative of the main current areas of application of AI: Economy, Commerce, and Education; Information Systems and Data Mining; Information Security and Infrastructure; Anti-Spam filtering and Email Virus Detection; Image processing and Human-Computer Interaction; Data compression; Robotics; Route Planning. The previous volume of this journal has presented original papers devoted to the internal art and craft of artificial intelligence research: its theoretical foundations, specific techniques, and research methodologies.

Total of 61 full papers by 156 authors from 15 different countries were submitted for evaluation, see Tables 1 and 2. Each submission was reviewed by three independent members of the Editorial Board of the volume. This volume contains revised versions of 26 papers: by 74 authors, selected for publication after thorough evaluation. Thus the acceptance rate was 42.6%. In Table 1, the number of papers by country was calculated by the shares of all authors of the paper: e.g., if a paper has three authors, two from Mexico and one from USA, then we incremented the counter for Mexico by 0.66 (two authors of three) and the counter for USA by 0.33. Table 2 presents the statistics of papers by topics according to the topics indicated by the authors; note that a paper can be assigned more than one topic.

The academic and editorial effort resulting in this volume was carried out in collaboration with, and was supported by, the Mexican Society for Artificial Intelli-

Copyright © Instituto Politécnico Nacional 2005
 Copyright © by Instituto Politécnico Nacional

Instituto Politécnico Nacional (IPN)
 Centro de Investigación en Computación (CIC)
 Av. Juan de Dios Bátiz s/n esq. M. Othon de Mendizábal
 Unidad Profesional "Adolfo López Mateos", Zacatenco
 07738, México D.F., México

<http://www.ipn.mx>
<http://www.cic-ipn.mx>

Printing: 500
 Impresiones: 500
 Printed in Mexico
 Impreso en México

Table 1. Statistics of authors and papers by country.

Country	Submitted		Accepted		Country	Submitted		Accepted	
	Auth	Pap	Auth	Pap		Auth	Pap	Auth	Pap
Brazil	14	4	—	—	Mexico	79	30.83	49	18.17
Canada	2	1	2	1	Norway	2	1	—	—
China	10	9	—	—	Poland	2	1	—	—
Czech Republic	1	1	—	—	Spain	19	5	16	4.5
France	1	0.33	1	0.33	Taiwan	6	2	6	2
Germany	1	1	—	—	UK	2	1	—	—
Korea, South	4	2	—	—	USA	1	0.33	—	—
Lithuania	2	1	—	—	total:	156	61	74	26

Table 2. Statistics of submitted and accepted papers by topic.

Topic	Submitted	Accepted
Expert Systems / KBS	1	1
Multigent systems and Distributed AI	13	5
Knowledge Management	3	2
Intelligent Interfaces: Multimedia, Virtual Reality	6	1
Natural Language Processing / Understanding	4	1
Computer Vision	4	2
Neural Networks	10	2
Genetic Algorithms	7	3
Fuzzy logic	5	2
Machine Learning	8	3
Intelligent Tutoring Systems	6	1
Data Mining	4	1
Knowledge Acquisition	3	-
Knowledge Representation	5	2
Knowledge Verification, Sharing and Reuse	1	-
Ontologies	6	1
Constraint Programming	1	-
Case-Based Reasoning	4	1
Nonmonotonic Reasoning	1	1
Spatial and Temporal Reasoning	1	1
Robotics	11	6
Planning and Scheduling	3	-
Navigation	1	1
Assembly	2	1
Hybrid Intelligent Systems	12	5
Logic Programming	1	1
Intelligent Organizations	3	3
Uncertainty / Probabilistic Reasoning	4	1
Biointomatics	2	1
Philosophical and Methodological Issues of AI	1	-
Other	13	5

gence (SMIA). We cordially thank all people involved in its preparation. In the first place these are the authors of the papers constituting it: it is the excellence of their research work that gives sense to the work of all other people involved. We thank the members of the Editorial Board of the volume and additional referees. We express our gratitude to Alvaro de Albornoz, Angel Kuri, Hugo Terashima-Marin, Francisco J. Cantu-Ortiz, Leticia Rodriguez, Fernando J. James, Rogelio Soto-Rodriguez, Hiram Calvo, Manuel Vilares, and Sulema Torres for their significant contribution at various stages of preparation of the volume. The submission, reviewing, and selection process was supported for free by the EasyChair system, www.EasyChair.org.

Alexander Gelbukh
Rauli Mamon

November 2005

Table of Contents

Indice

Page/Pág.

Economy, Commerce and Education

Selection of Segments to be Sourced from Low Cost Countries for a Global Industrial Equipment Manufacturer based on a Multi-Attribute Decision Support System.....	3
<i>Antonio Jiménez, Luis C. Rodríguez, Alfonso Mateos and Sixto Ríos-Insua</i>	

Decision Support Systems for Portfolio Optimization.....	13
<i>Maria A. Osorio-Lama and Abraham Sanchez-López</i>	

Location-based Support for Commerce using Multiagent Negotiation	23
<i>Ramon Brena, Luis Marcelo Fernández, Jesús Hector Domínguez and José Luis Aguirre</i>	

Ontologies for Student and Domain Models in Adaptive and Collaborative Learning System	33
<i>José M. Gascuña, Antonio Fernández-Caballero and Pascual González</i>	

Information Systems and Data Mining

Shallow Parsing and Information Extraction	45
<i>Diego Uribe</i>	

Identifying Information from Heterogeneous and Distributed Information Sources for Recommender Systems	55
<i>Silvana Vanesa Aciar, Josefina López Herrera and Josep Luis de la Rosa</i>	

Model Selection in Data Mining: A Statistical Approach.....	65
<i>Jose A. Frydman P., Francisco J. Cantu Ortiz, Jorge H. Sierra Cavazos and Rubén Morales-Menéndez</i>	

Use of an ANFIS Network for Relative Humidity Behaviour Modelling on the South Region of Jalisco, México.....	75
<i>Marco Gamboa, Marco Castro and Francisco Herrera</i>	

Information Security and Infrastructure

Multi-Agent System Design Based on Security Policies.....	87
<i>Zeus Andrade Zaldivar, Ma. De los Angeles Junco Rey, Jorge Adolfo Ramirez Uresti, José Arturo Tejeda Gómez and Enrique David Espinosa Carrillo</i>	

An Artificial Manager for Security Policies in Organizations.....	97
<i>Karen Garcia, Raül Monroy and Jesús Vázquez</i>	

A service-oriented approach for integrating multiagent systems with web-services in a collaboration application.....	107
<i>Eduardo H. Ramirez and Ramon F. Brena</i>	

Anti-Spam Filtering and Email Virus Detection

A Collaborative Learning Method For Spam Filtering.....	119
<i>Hsiu-Sen Chiang, Jui-Chi Shen, Dong-Her Shih and Chia-Shyang Lin</i>	

Analyzing the Impact of Corpus Preprocessing on Anti-Spam Filtering Software.....	129
<i>J. R. Méndez, E. L. Iglesias, F. Fdez-Riverola, F. Díaz and J.M. Corchado</i>	

Misuse Detection of Email Viruses base on SOM with k-medoids....	139
<i>Dong-Her Shih, Sheng-Fei Hsu, Hsiu-Sen Chiang and Chun-Pin Chang</i>	

Image Processing and Human-Computer Interaction

A Statistical Learning-Based Method for Color Correction of Underwater Images.....	151
<i>Luz Abril Torres-Méndez and Gregory Dudek</i>	

Recognition of Shorthand Writing using Neural Networks.....	161
<i>Diana M. Vázquez, Karla L. Segovia and Roberto A. Vázquez</i>	

Data Compression

Data Compression Using a Dictionary of Patterns.....	173
<i>Angel Kuri and José Galaviz</i>	

MSIM: A Pattern Based Lossless Data Compressor.....	183
<i>Angel Kuri-Morales and Oscar Herrera-Alcántara</i>	
Practical Estimation of Kolmogorov Complexity using Highly Efficient Compression Algorithms.....	193
<i>Angel Kuri-Morales, Oscar Herrera, José Galaviz and Martha Ortiz-Posadas</i>	

Robotics

Steering Control of an Ackerman Mobile Robot Using Fuzzy Logic.....	205
<i>Enrique Alarcón-Avila, Stivalis Anahí Martínez-Cuevas and Alejandro Rangel-Huerta</i>	

Evolving Robot Behavior for Centralized Action Selection.....	213
<i>Ferrando Montes González and José Santos Reyes</i>	

Formations in Collective Robotics.....	223
<i>Yazid León Fernández de Lara and Angélica Muñoz Meléndez</i>	

MINI-TRANS: A Multi-robot System with Self-assembling Capabilities.....	233
<i>Maria Guadalupe Jiménez Velasco and Angélica Muñoz Meléndez</i>	

Biofeedback Agents for Electromyoccontrolled teleoperated Robots..	243
<i>Sandra Diaz, Carlos Nieto, Marissa Diaz and Ricardo Swain</i>	

Route Planning

Extending and applying PP language: An answer set planning problem language.....	255
<i>Claudia Zepeda, Mauricio Osorio, Christine Sohn and David Sol</i>	

Planning motion for animated characters.....	265
<i>Abraham Sánchez López, Josué Sánchez Texis and René Zapata</i>	

2. Baeyen, H., Van Halteren, H., Neijt, A., and Tweedie, F.: An experiment in authorship attribution. In *Journ ees internationales d'Analyse statistique des Donn ees Textuelles*, (2002)
3. Cohen, William W.: Learning Rules that classify e-mail, the AAAI Spring Symposium on Machine Learning in Information Access: (1996) 18-25
4. Data Mining Cup 2003. Contest data, instructions and results (2003) available from: <http://www.data-mining-cup.com/2003/Wettbewerb/1059704704/>
5. Drucker, H., Wu, D., and Vapnik, V., N.: Support Vector Machines for Spam Categorization. *IEEE Transaction on Neural Networks*, Vol 10, No 5, (1999)
6. Grand-Carrer, C.: Unifying Learning with Evolution through Baldwin an Evolution and Lamarckism: A Case Study. In: *Proceedings of the Symposium on Computational Intelligence and Learning (CoIL-2000)*, MIT GmbH, June (2000) 36-41
7. Gomez Hidalgo, J. M.: Evaluating Cost-sensitive Unsolicited Bulk Email Categorization. In *Proceedings of SAC-02, 17th ACM Symposium on Applied Computing*, Madrid, ES, (2002) 615-620
8. Han, J. and Kamber, M.: Data mining concepts and techniques (USA, Morgan Kaufmann, 2001) page 284-287
9. Jin, R. and Si, L.: A study of methods for normalizing user ratings in collaborative filtering. *Proceedings of the 27th annual international conference on Research and development in information retrieval*, July (2004) 568-569
10. Joachims, T.: A probabilistic analysis of the Rocchio algorithm with TFIDF for text categorization. In *Proc. of 14th International Conference on Machine Learning*, (1997)
11. Jung, Jaeyoon, and Sit, Emil: An empirical study of spam traffic and the use of DNS black lists. *Proceedings of the 4th ACM SIGCOMM conference on Internet measurement*, October (2004) 370-375
12. Katrai, H.: Filtering junk e-mail: A performance comparison between genetic programming & naive bayes. (1999) available from: <http://members.rogers.com/hoomank/papers/katrai99filtering.pdf>
13. Kohavi, R.: A study of cross-validation and bootstrap for accuracy estimation and model selection. *IJCAI*, (1995)
14. Ludlow, M., Just 150 'spammers' blamed for e-mail woe. *The Sunday Times*, 1st December (2002) page 3
15. Metzger, J., Schillo, M. and Fischer, K.: A multilagen-based peer-to-peer network in java for distributed spam filtering. In *Proc. of the CEERWAS*, Czech Republic, June (2003)
16. O'Brien, C. and Vogel, C.: Spam filters: Bayes vs. chi-squared: letters vs. words. In *Proceedings of the International Symposium on Information and Communication Technologies*, (2003)
17. O'Brien, C. and Vogel, C.: Comparing SpamAssassin with CHDF. *Email Filtering*. In *Proceedings of the 7th Annual CLUK Research Colloquium*, (2004)
18. Provost, J.: Naive-bayes vs. rule-learning in classification of email. *Technical Report AI-TR-99-284*. University of Texas at Austin, Artificial Intelligence Lab, (1999)
19. Quinlan, J. R.: C4.5: Programs for Machine Learning. Morgan Kaufmann series in machine learning. Morgan Kaufmann, (1993)
20. Robinson, G.: A Statistical Approach to the Spam Problem. *Linux Journal*, March 2003. *Linux Journal*, Volume 2003, Issue 107, March (2003) Page 3
21. Schapire, R.E., and Singer, Y.: Boostexter: A Boosting-based System for Text Categorization. *Machine Learning*, vol 39, (2000) 135-168
22. UCI Machine Learning Repository. Retrieved Jan 20, (2005) available from: <http://www.ics.uci.edu/~mllearn/MLRepository.html>

Analyzing the Impact of Corpus Preprocessing on Anti-Spam Filtering Software

J. R. Méndez¹, E. L. Iglesias¹, F. Fdez-Riverola¹, F. Díaz², J.M. Corchado³

¹ Dept. Informática, University of Vigo, Escuela Superior de Ingeniería Informática, Edificio Politécnico, Campus Universitario AS Lagoas s/n, 32004, Ourense, Spain
(moncho.mendez | eva | riverola)@uvigo.es

² Dept. Informática, University of Valladolid, Escuela Universitaria de Informática, Plaza Santa Eulalia, 9-11, 40005, Segovia, Spain
fdiaz@info.uva.es

³ Dept. Informática y Automática, University of Salamanca, Plaza de la Merced s/n, 37008, Salamanca, Spain
corchado@usal.es

Abstract. Because of the volume of spam e-mail and its evolving nature, many statistical techniques have been applied until now for the construction of anti-spam filtering software. In order to train and test filters, it is necessary to have a large e-mail corpus. In this paper we discuss several considerations that researchers must take into account when building and processing a corpus. After reviewing several text preprocessing methods used on spam filtering, we show the results obtained by different machine and lazy learning approaches when the preprocessing of the training corpus changes. The results obtained from the experiments carried out are very informative and they back up the idea that instance-based reasoning systems can offer significant advantages in the spam filtering domain.

1 Introduction and Motivation

Unsolicited e-mail messages, also known as spam, have become a serious problem for internet users. Recent studies show that between one-seventh and one-half of e-mail messages going into internet user inboxes are spam [1].

Nowadays anti-spam filtering software seems to be the most viable solution to the spam problem. It works attempting to automatically identify an incoming e-mail message using different approaches [2] and classifying it as either 'spam' or 'legitimate'. Spam filtering methods are often classified as rule-based or content-based (statistical). The first ones classify documents based on whether or not they meet a particular set of criteria [3]. The last ones do not require specifying any rules explicitly. They are primary driven by statistics that can be derived from the content of the messages (i.e., word frequency) [4].

In our work we identify two main types of content-based techniques: (i) machine learning (ML) algorithms and (ii) memory-based and case-based reasoning approaches. ML approaches use an algorithm to 'learn' the classification from a set of

training messages. On the other hand, memory-based and case-based reasoning techniques store all training instances in a memory structure and try to classify new messages finding similar e-mails on it. Hence, the decision of how to solve a problem is deferred until the last moment.

Content-based filters tend to be more successful than rules-based ones. It is more difficult for spammers to create a spam e-mail because they have no idea what type of e-mail each user is training their filters on. Furthermore, the lazy nature of memory-based and case-based approaches makes them specially suitable for dynamic environments as span [5, 6].

In order to train and test content-based filters, it is necessary to build a large corpus with spam and legitimate e-mails or use a public corpus. Anyway, e-mails have to be preprocessed to extract their words (*features*). Also, since the number of features in a corpus can end up being very high, it will generally be necessary to choose those features that better represent e-mails before carrying out the filter training to prevent the classifiers from overfitting.

The effectiveness of content-based anti-spam filters relies on the appropriate choice of the features. If the features are chosen so that they may exist both in a spam and legitimate messages then, no matter how good learning algorithm is, it will make mistakes. Therefore, the preprocessing step of e-mail features extraction and the later selection of the most representative are crucial for the performance of the filter.

Our main goal in this paper is the evaluation and comparison of different feature extraction techniques used in text categorization. We will analyze what are their strengths and weaknesses when they are applied to the spam problem domain. Therefore, we will show the results obtained by different well-known content-based techniques when the preprocessing of the training corpus changes. The selected models go from the utilization of Naïve Bayes [7], boosting trees [8], Support Vector Machines [9] to three case-based systems for spam filtering that can learn dynamically: a Cunningham *et al.* system which we call *Cunn Odds Rate* [10], its improved version named ECUE [11] and the SpamHunting system [12].

The rest of the paper is organized as follows: Section 2 introduces previous work on machine learning and case-based e-mail filters. Section 3 describes the selected public available corpus for empirical model evaluation. Section 4 discusses several issues related with message representation and feature selection. Section 5 presents the experiments carried out and the results obtained and discusses the major findings. Finally, Section 6 exposes the main conclusions reached by the analysis of the experiments carried out.

2 Spam Filtering Techniques

2.1 Machine Learning Approaches

The most popular classical filtering models are bayesian methods. Bayesian filtering is based on the principle that most of the events are conditioned. So, the probability

that an event happens can be deduced from the previous appearances of that event. This technique can be used to classify spam. If some feature is often in spam but not in legitimate e-mails, then it would be reasonable to assume that an e-mail including this feature will be probably spam. Although there are several approaches of the bayesian method, the most widely used to spam filtering is Naïve Bayes algorithm [17]. Besides bayesian models, Support Vector Machines (SVM) and boosting techniques are also well-known ML techniques used in this field.

SVMs [9] are based on representing e-mails as points in an n -dimensional space and finding an hyperplane that generates the largest margin between the data points in the positive class and those in the negative class. SVM has become very popular in the ML and DM community due to its good generalization performance and its ability to handle high-dimensional data through the use of kernels. Some implementations of SVM can be found in ML environments such as Waikato Environment for Knowledge Analysis¹ (WEKA) or Yet Another Learning Environment² (YALE). Particularly, WEKA includes the *Sequential Minimal Optimization* (SMO) algorithm which has demonstrated a good trade-off between accuracy and speed (see [13] for details). Boosting algorithms [8] are techniques based on the use of weak learners; that is to say, algorithms that learn with a next error rate to 50%. The main idea of boosting is to combine the hypotheses to one final hypothesis, in order to achieve higher accuracy than the weak learner's hypothesis would have. Different boosting algorithms have been developed for classification tasks, so much binary as multi-class. Among them we could highlight Adaboost [14].

Recently, several new ML models has been introduced for e-mail classification such as Chung-Kwei [15], which is based on pattern-discovery. As well as it is faster than other ML approaches, it becomes better on performance.

2.2 Case-based Reasoning Approaches

Case-based approaches outperform previous techniques in anti-spam filtering [11]. Case-based classification works well for disjoint concepts as spam (spam about *porn* has little in common with spam offering *rolex*) whereas ML techniques try to learn a unified concept description. Another important advantage of this approach is the ease with which it can be updated to tackle the *concept drift* problem in the anti-spam domain [6].

Delany *et al.* present in [11] a case-based system for anti-spam filtering called ECUE (*E-mail Classification Using Examples*) that can learn dynamically. The system use a similarity retrieval algorithm based on Case Retrieval Nets (CRN) [16]. CRN networks are equivalent to the k -nearest neighbourhood algorithm but are computationally more efficient in domains where there is feature-value redundancy and missing features in cases, as spam. ECUE classifier use unanimous voting to determine whether a new e-mail is spam or not. All the returned neighbours need to be classified as spam e-mails in order to classify as spam the new message. The ECUE

¹ WEKA is available from <http://www.cs.waikato.ac.nz/ml/weka/>

² YALE is available from <http://yale-sourceforge.net>

system represents the evolution from *Cumulative Odds Rate* [10], a previous successful system of the same authors.

Also, in [12] a lazy learning hybrid system is introduced to accurately solve the problem of spam labelling and filtering. The model, named SpamHunting, follows an Instance-Based Reasoning (IBR) approach. According to this, SpamHunting uses an instance memory structure as primary way of manage knowledge. The retrieval stage is carried out using a novel dynamic k -NN Enhanced Instance Retrieval Network (EIRN). The EIRN network facilitates the indexation of instances and the selection of those that are most similar to the new e-mail. Similarity between two given e-mails is measured by the number of relevant features found in both messages. EIRN can quickly retrieve all stored e-mails having at least one shared feature with a target message. The reuse of similar messages is done by means of a simple unanimous voting mechanism to determine whether the target case is spam or not. The revision stage is only carried out in the case of unclassified messages, where the system employs general knowledge in the form of meta-rules extracted from the e-mail headers to assign a final class.

3 Benchmark Corpus for Spam Filtering Research

As previously mentioned, it is essential to provide content-based filters with an appropriate corpus of e-mails for training and testing purposes. The corpus should be made up of both spam and legitimate e-mails. Each message should be marked as being either spam or non-spam. By training the filters on this corpus, they should learn the main characteristics that differentiate spam from legitimate messages.

Table 1. Temporal distribution of messages belonging to the SpamAssassin corpora of emails

	Jan 02	Feb 02	Mar 02	Apr 02	May 02	Jun 02	Jul 02	Aug 02	Sep 02	Oct 02	Nov 02	Dec 02	Sum 02
Spam	2	1	0	0	0	1	8	182	276	5	0	0	475
Error	-	-	-	-	-	-	-	-	-	-	-	-	26
Legitim.	0	44	0	0	2	5	157	561	1272	757	0	0	2798
Total													3299
	Jan 03	Feb 03	Mar 03	Apr 03	May 03	Jun 03	Jul 03	Aug 03	Sep 03	Oct 03	Nov 03	Dec 03	Sum 03
Spam	0	12	18	18	312	145	496	330	274	6	9	25	1645
Error	-	-	-	-	-	-	-	-	-	-	-	-	239
Legitim.	1	44	0	0	2	7	704	1334	1239	727	36	55	4149
Total													6033

Despite privacy issues related with the content of a message, there are several public available corpora of e-mails just as LingsSpam³, PU⁴, JunkE-mail⁴, DivMod⁵ or

³ Available at <http://www.iit.demokritos.gr/>

⁴ Available at <http://cig.wiv.ac.uk/projects/junk-e-mail/>

SpamAssassin⁶. In our work, we use the SpamAssassin corpora. It contains 9332 different messages from January 2002 up to and including December 2003 distributed as Table 1 shows. The error row shows the presence of messages with a corrupt date.

4 Message Representation

In order to increase message manipulation speed as well as knowledge representation ability, messages should not be stored in its primitive form, as they are in a original corpus. It is necessary to convert each message into a reliable message descriptor which can be easily assembled. In learning algorithms, training messages are usually represented as a vector $\vec{T} = (t_1, t_2, \dots, t_p)$ of weighted terms, T_i , much as in the vector space model in information retrieval [17, 18].

Features can be identified using a variety of generic lexical tools, primarily by tokenising the e-mail into words. At first glance, all that seems to be involved in it is the recognition of spaces as word separators. However, at least the following particular cases have to be considered with care: hyphens, punctuation marks, and the case of the letters (lower and upper case).

Lexical analyzer normally breaks hyphenated words and remove punctuation marks. However, in the spam domain many of these symbols are among the best discriminating attributes in a corpora, because they are more common in spam messages than legitimate ones. For this reason, hyphens and punctuation marks are not removed here. On the subject of case, the lexical analyzer normally converts all the text to either lower or upper case. It is also done here to reduce the number of terms.

In text categorization it is common to reduce the set of representative terms with very large collections [18]. This can be accomplished through the elimination of *stopword* (such as articles and connectives) and the use of *stemming* (which reduces distinct words to their common grammatical root). Since spam is a special form of text categorization, it could be applied here also.

Once carried out the lexical analysis over the corpus, the weight of terms in each message e_i need to be calculated. The measure of the weight can be (i) binary (1 if the term occurs in the message, 0 otherwise), (ii) the *term frequency* (TF) representing the number of times the term occurs in the message calculated by Expression (1) or (iii) the *inverse document frequency* (IDF) given by Expression (2) denoting those terms that are common across the messages of the training collection.

$$t_i(e) = \frac{n_i(e)}{N(e)} \quad (1)$$

$$t_i(e) = \frac{n_i(e)}{N(e)} \log_2 \frac{m}{df(T)} \quad (2)$$

⁵ Available at <http://www.divmod.org/cvs/corpus/spam/>

⁶ Available at <http://www.spamassassin.org/publiccorpus/>

In Equations (1) and (2), $n(e)$ is the number of occurrences of term T_i in e , $M(e)$ represents the total number of occurrences of terms in e , m is the number of training messages and $d(T)$ stands for the number of training messages where the term T_i occurs.

5 Performance Evaluation

The final goal of our experiments is to measure the impact of applying different preprocessing steps over the corpus before training the models. The experiments have been done using Naive Bayes, a SMO implementation of SVM, Adaboost, and the three previously commented CBR systems: ECUE, *Cum Odds Rate* and SpamHunting.

Six well-known metrics [4] have been used in order to evaluate the performance (efficacy) of all the analyzed models: percentage of correct classifications (%OK), percentage of False Positives (%FP), percentage of False Negatives (%FN), spam recall, spam precision and total cost ratio (TCR) with three different cost values. The experiments were carried out at three different preprocessing scenarios: (i) applying stopword removal and stemming analysis, (ii) applying stopword but without stemming and (iii) without applying neither stopword nor stemming.

Typically, message representation scheme presented in Section 4 leads to very high-dimensional feature spaces. Several authors have noted the need for feature selection in order to make possible the use of conventional ML techniques, to improve generalization accuracy and to avoid over fitting of the models. Following the recommendation of [19], the *information gain* (IG) criterion is usually used to select a representative subset of features.

All the analyzed models except from *Cum Odds Rate* and SpamHunting systems use IG to select the most predictive features as it has been shown to be an effective technique in aggressive feature removal in text classification [19]. For our comparisons, we have selected the best performance model of each technique varying between 100 and 2000 features. For *Cum Odds Rate* model, we have maintained the original technique of selecting 30 words for representing spam e-mails plus 30 words representing legitimate messages. The algorithm employed for sorting the vocabulary is based on the odds-ratio described in [11].

SpamHunting terms selection is not made using the vocabulary of the whole corpus. Instead of this, each message has its own relevant terms. The relevant feature list of each message is computed as the minimum set containing the most frequent features of the specified e-mail, which frequency amount is greater than a specified threshold in the range [0,1]. As the best results have been obtained using the 30% frequency amount, we computed the relevant feature list as the most repeated features whose frequency amount is greater than mentioned threshold.

All the experiments have been carried out using a 10-fold stratified cross-validation [20] in order to increase the confidence level of results obtained.

5.1 Experimental Results

Figure 1 shows the percentage of correct classifications, false positive rate and false negative rate belonging to the six analyzed models over the defined scenarios. Analyzing Figure 1 we can realize that Naive Bayes and SVM techniques get better performance with no stemming and no stopword removal (Scenario 3). When stopword accuracy but generally worst results. However, applying only stopword removal (Scenario 2) in those models that do not incorporate IG for feature selection leads to a significant accuracy increment. In order to facilitate a deeper analysis, Table 2 shows the mean values over the 10 fold-cross validation for the scores presented in Figure 1.

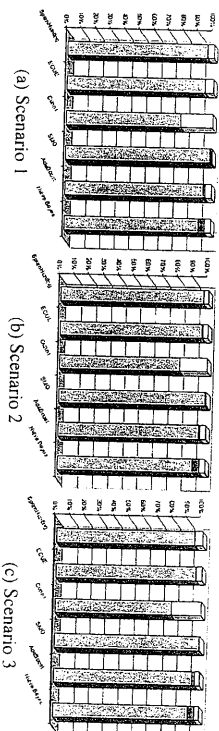


Fig. 1. Comparative model performance varying preprocessing steps

Table 2. Mean value of correct classifications, FPs and FNs with 10 fold-cross validation

	Naive Bayes	Ada boost	SVM	Cum Odds Rate	ECUE	Spam Hunting
Scenario 1	OK	852.5	881.9	920.2	730.4	880.2
	False Positives	43	12.2	7.8	0.5	3.6
	False Negatives	37.7	39.1	5.2	202.3	49.4
Scenario 2	OK	849.6	885.1	919.1	758.3	893
	False Positives	48.6	13.4	8.7	0.2	6.1
	False Negatives	35	34.7	5.4	174.7	34.1
Scenario 3	OK	857.9	883.4	922.2	742.1	889.8
	False Positives	44	16	5.3	0.1	6.8
	False Negatives	31.3	33.8	5.7	191	36.6

Table 3 shows a comparative study between the three proposed scenarios using recall and precision scores. Results on recall evaluation using classical ML models are better when no stopword removal and no stemming is used (Scenario 3). However, CBR/BR approaches become better when only stopword removal is performed (Scenario 2) while the worst results are obtained when both stemming and stopword removal is applied (Scenario 1).

Table 3. Averaged precision and recall scores over 10 fold-cross validation

	Naive Bayes	Ada boost	SVM	Cnn Odds Rate	ECUE	Spam Hunting
Scenario 1	Recall 0.842 Precision 0.824	0.836 0.943	0.978 0.968	0.150 0.986	0.793 0.981	0.837 0.993
Scenario 2	Recall 0.853 Precision 0.807	0.854 0.939	0.977 0.964	0.266 0.997	0.857 0.971	0.871 0.991
Scenario 3	Recall 0.869 Precision 0.824	0.858 0.928	0.976 0.978	0.198 0.998	0.846 0.967	0.795 0.978

Analyzing in Table 3 precision scores gathered from experiments, we can realize that it is possible to obtain better results when stopword removal and stemming is applied (Scenario 1) except for SVM and *Cnn Odds Rate* models. These techniques work better without any preprocessing step (Scenario 3).

In order to compare the performance of the models taking into account the three predefined scenarios but with a cost-sensitive point of view, we calculate the TCR score in three different situations. TCR assumes that FP errors are λ times more costly than FN errors, where λ depends on the usage scenario (see [4] for more details). In the experiments carried out in this paper, the values for λ parameter were 1, 9 and 999.

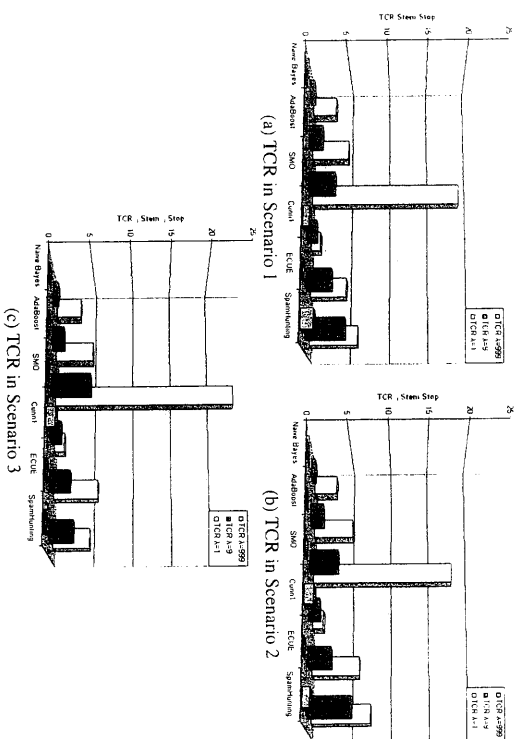
Fig. 2. TCR score graphics varying λ (equal to 1, 9, 999) value in the three different scenarios

Figure 2 shows the results taking into account the TCR score and varying the λ parameter. The best performance on classical ML approaches are obtained when no stemming and no stopword removal are applied (Scenario 3) except for Adaboost, that increases its TCR score when only stopword are applied (Scenario 2). By other side, CBR/IBR approaches work better if stopword are applied to the corpus (Scenarios 1 and 2).

6 Conclusions

In this paper we have analyzed the impact of corpus preprocessing in the performance of anti-spam filtering software. For this task, we have briefly revised the most popular filtering techniques from the ML community as well as CBR and IBR previous successful implemented systems. Before defining the experiments to carry out, we have presented the benchmark corpora of e-mails and discussed several issues about message representation.

In order to carry out the experiments, we have considered three different scenarios and six standard scores to measure performance among the models. 10-fold stratified cross-validation was used in order to increase the confidence level of results obtained. From the analysis of these results we can infer valuable information about the preprocessing needed in order to construct accurate anti-spam filtering models.

Firstly, classical ML based models can get the best number of correctly classified messages by removing all preprocessing steps, but stopword removal and stemming is recommended if best accuracy is needed. Secondly, CBR/IBR models can obtain better performance by stopword removal although stemming can improve accuracy.

Moreover, applying stemming can significantly reduce the number of selected features belonging to the corpus. According to this, it will also decrease the time needed to compute IG for all features and the spam recall score. Nevertheless, as results show, if stemming is applied the models will obtain the smallest amount of correct classifications excluding the SpamHunting system.

If the main goal is the minimization of the FP errors among the models, the results obtained from experiments suggest that stemming should be used. This idea is backed up because legitimate messages are better classified when stemming is used (by the fact helps the models to better differentiate spam from legitimate e-mails). This fact helps the models to better differentiate spam from legitimate e-mails. In addition, if the main goal is the improvement in correct classification rate (therefore diminishing the total number of errors), then stemming is not recommended.

It is important to highlight that depending on the model, different results are obtained when changing the preprocessing steps carried out over the whole corpus. So, these issues need to be kept in mind in both training the model comparing its accuracy with another anti-spam classifiers.

The main conclusion of this work is that the effort on stemming and removing stopwords does not pay in improvement of the current algorithms for spam detection. In addition, spam producers are very creative, and learning from a static corpus (pre-processed or not) seems to be a now a naive approach.

References

1. Vakrin, S.: The Economics of Spam. United Press International (2002)
2. Michelakis, E., Androussopoulos, I., Paliouras, G., Sakki, G., Stamatiopoulos, P.: Filtern: A Learning-Based Anti-Spam Filter. Proc. of the First Conference on E-mail and Anti-Spam CEAS (2004)
3. Writel, G.L., Wu, S.F.: On Attacking Statistical Spam Filters. Proc. of the First Conference on E-mail and Anti-Spam CEAS (2004)
4. Androussopoulos, I., Paliouras, G., Michelakis, E.: Learning to Filter: Unsolicited Commercial E-Mail. Technical Report 2004/2, NCSR "Demokritos" (2004)
5. Kelly, M.G., Hand, D.J., Adams, N.M.: The impact of changing populations on classifier performance. Proc. of the 5th International Conference on Knowledge Discovery and Data Mining, ACM Press, (1999) 367-371
6. Widmer, G., Kubat, M.: Learning in the presence of concept drift and hidden contexts. Machine Learning, Vol. 23 (1), (1996) 69-101
7. Sahami, M., Dumais, S., Heckerman, D., Horvitz, E.: A Bayesian approach to filtering junk e-mail. In Learning for Text Categorization - Papers from the AAAI Workshop, (1998) 55-62. Technical Report WS-98-05 AAAI
8. Carreras, X., Marquez, L.: Boosting trees for anti-spam e-mail filtering. Proc. of the 4th International Conference on Recent Advances in Natural Language Processing, (2001) 58-64
9. Vapnik, V.: The Nature of Statistical Learning Theory. 2nd Ed. Statistics for Engineering and Information Science, Springer, New York (1999)
10. Delany, S.J., Cunningham P., Coyle L.: An Assessment of Case-base Reasoning for Spam Filtering. Proc. of Fifteenth Irish Conference on Artificial Intelligence and Cognitive Science: AICS-04, (2004) 9-18
11. Cunningham, P., Nowlan, N., Delany, S.J., Haahr, M.: A Case-Based Approach to Spam Filtering that Can Track Concept Drift. Proc. of the ICCBR'03 Workshop on Long-Lived CBR Systems, (2003)
12. Fdez-Riverola, F., Mendez, J.R., Iglesias, E.L., Diaz, F.: Representación flexible de e-mails para la construcción de filtros anti-spam: un caso práctico. Proc. of the VI Jornadas de Transferencia Tecnológica de Inteligencia Artificial. *To appear*.
13. Platt, J.: Fast training of Support Vector Machines using Sequential Minimal Optimization. In Sholkopf, B., Burges, C., Smola, A. (eds), Advances in Kernel Methods - Support Vector Learning, MIT Press, (1999) 185-208
14. Schapire, R.E., Singer, Y.: BoostTexter: a boosting-based system for text categorization. Machine Learning, Vol. 39 (2/3), (2000) 135-168
15. Isidore Rigoutsos and Tien Huynh. Chung-Kwei: a Pattern-discovery-based System for the Automatic Identification of Unsolicited E-mail Messages (SPAM). Proc. of the First Conference on E-mail and Anti-Spam CEAS (2004)
16. Lenz, M., Auriol, E., Mamagò, M.: Diagnosis and Decision Support. Case-Based Reasoning Technology. Lecture Notes in Artificial Intelligence, Vol. 1400, (1998) 51-90
17. Salton, G., McGill, M.: Introduction to modern information retrieval, McGraw-Hill, (1983)
18. Baeza-Yates, R., Ribeiro-Neto, B.: Modern Information Retrieval. Addison Wesley, (1999)
19. Yang, Y., Pedersen, J.O.: A comparative study on feature selection in text categorization. Proc. of the Fourteenth International Conference on Machine Learning, ICML-97, (1997) 412-420
20. Kohavi, R.: A study of cross-validation and bootstrap for accuracy estimation and model selection. Proceedings of the 14th International Joint Conference on Artificial Intelligence, IJCAI-95, (1995) 1137-1143

Misuse Detection of Email Viruses base on SOM with k-medoids

Dong-Her Shin, Sheng-Fei Hsu, Hsiu-Sen Chiang, and Chun-Pin Chang

National Yunlin University of Science and Technology, Department of Information Management, 123, Section 3, University Road, Toulin, Yunlin, Taiwan
{shihsh, 99320803, 990233728, 99123728}@yuntech.edu.tw

Abstract. Email virus is an email that can infect other programs by modifying them to include a replication of it. When the infected emails are opened, the email virus spreads itself to others. We propose a novel approach to detect misuse emails by gathering and maintaining knowledge of the behavior of the malicious emails rather than anticipating attacks by unknown assailants. Any new activity of the email is compared to the malicious profile to detect a potential misuse. Comparison results show that our proposed methods outperformed than anti-virus software.

1 Introduction

In recent years, the number of Internet users worldwide has continued to rise dramatically as the Internet expands. Within this growth, serious problems such as unauthorized intrusions, denial of service attacks, and computer viruses have arisen. In particular, a computer virus (hereafter, virus) is able to cause damage to a large number of systems because of its ability to propagate. As a result, the power of such attacks can now have a serious impact on an information society. Analysis of reported virus incidents during the five-year period [1] provides interesting insights for virus research, as it reflects a period of rapid uptake in the application of the Internet and the use of e-mail for business purposes.

Recently, a kind of virus that can infect executable files has appeared. This kind of virus spreads far more rapidly than before and can propagate by email, one means of information exchange among users. As shown in [2], the email vector again took an upward turn. Virus disasters and incidents have organizational ramifications beyond the money, resources, and effort required to recover from such incidents.

Our focus in this paper is primarily on detection of the misuse of malicious emails. Misuse detection systems offer a cost-effective compromise to establishing and assuring a certain degree of security in a system [3]. Our research presents a framework, an email virus filter that can detect malicious Windows attachments by integrating with an email server. Analyzing the characteristic of the email virus, to pickled out differentiate one email virus from another. Our goal is to design and build a scanner that accurately detects email virus before they have been entered into a host.

been implemented in our RMP3D architecture and successfully demonstrated on several examples. The combination of randomized motion planning techniques and motion capture editing techniques offer promising results [9].

RMP3D uses Basic-PRM, Gaussian-PRM or Lazy-PRM techniques that capture the configuration space connectivity into a roadmap. Through the examples we have demonstrated that our approach works well. The computing time vary according to the selected scheme of planning.

Although some promising results are shown in its present form, the algorithm could be improved in a number of important ways. We are interested in investigating reactive planning methods to deal with dynamic environments. The generation of collision-free motions for two or more characters, is another objective to the future and also the cooperation between virtual characters handling bulky objects, etc.

References

1. Kavraki, L., Svetska, P., Latombe, J.-C., Overmars, M. H. "Probabilistic roadmaps for path planning in high-dimensional configuration spaces", *IEEE Transactions on Robotics and Automation*, Vol 12, No. 4, (1996) 566-579.
2. Latombe, J. C.: "Motion Planning: A Journey of robots, molecules, digital actors, and other artifacts", *The International Journal of Robotics Research*, Vol. 18, no. 11, (1999) 1119-1128.
3. Lengyel, J., Reichert, M., Donald, B., Greenberg, D. P.: "Real-time robot motion planning using rasterizing computer graphics hardware", *ACM SIGGRAPH*, Vol. 24 (1990) 327-335.
4. Koga Y., Kondo K., Kuffner J., Latombe J. C.: "Planning motions with intentions", *ACM SIGGRAPH*, (1994) 395-408.
5. Kuffner J. J.: "Goal-directed navigation for animated characters using real-time path planning and control", *CAPTECH 98*, (1998).
6. Foskey M., Garber M., Lin M., Manocha D.: "A Voronoi-based hybrid motion planner for rigid bodies", *IEEE Int. Conf. on Robotics and Automation*, (2000).
7. Shiller Z., Yamane K., Nakamura Y.: "Planning motion patterns of human figures using a multi-layered grid and the dynamics filter", *IEEE Int. Conf. on Robotics and Automation*, (2001) 1-8.
8. Choi M. G., Lee J., Shin S. Y.: "Planning biped locomotion using motion capture data and probabilistic roadmaps", *ACM Transactions on Graphics*, Vol. 5, No. N (2002) 1-25.
9. Pettré J., Laumond J. P., Siméon T.: "A 2-stages locomotion planner for digital actors", *Eurographics/SIGGRAPH Symposium on Computer Animation*, (2003).
10. Witkin A., Popović Z.: "Motion warping", *SIGGRAPH 95*, (1995).
11. Boer V., Overmars M., Van der Steppen F.: "The gaussian sampling strategy for probabilistic roadmap planners", *IEEE Int. Conf. on Robotics and Automation*, (1999) 1018-1023.
12. Bohlin, R., Kavraki, L. "Path planning using lazy PRM", *IEEE Int. Conf. on Robotics and Automation*, (2000) 521-528.
13. Maitin F., France L., Cani-Gascuel M. P., Debonne G.: "Computer animation of human walking: A survey", *Journal of Visualization and Computer Animation* (1999)

Author Index

Index de auteurs

Aciar, Silvana Vanesa	55	Morales Mendíez, Rubén	65
Aguirre, José Luis	23	Muñoz Meléndez, Angélica	223, 273
Alarcón Avila, Enrique	205	Nieto, Carlos	243
Andrade Zaldivar, Zeus	87	Ortiz Posadas, Martha	193
Brena, Ramon F.	23, 107	Osorio Lama, Maria A.	13
Cantú Ortiz, Francisco J.	65	Osorio, Mauricio	255
Castro, Marco	75	Ramirez Uresti, Jorge Adolfo	87
Chia Shyang, Lin	119	Ramirez, Eduardo H.	107
Chun Pin, Chang	139	Rangel Huerta, Alejandro	205
Corchado, J.M.	129	Rios Insua, Sixto	3
Diaz, F.	129	Rodriguez, Luis C.	3
Diaz, Marissa	243	Sánchez Lopez, Abraham	13, 265
Dominguez, Jesús Héctor	243	Sánchez Texis, Josué	265
Dong Her, Shih	23	Santos Reyes, José	213
Dudek, Gregory	119, 139	Segovia, Karla L.	161
Espinosa Carrillo, Enrique David	151	Sheng Fei, Hsu	139
Fernández Caballero, Antonio	87	Sierra Cavazos, Jorge H.	65
Fernández Riverola, F.	33	Sol, David	255
Fernández, Luis Marcelo	129	Solmon, Christine	255
Fydyman P., Jose A.	23	Swain, Ricardo	243
Galaviz, Jose	65	Tejada Gómez, José Arturo	87
Gamboá, Marco	173, 193	Torres Méndez, Luz Abril	151
García, Karen	75	Uribe, Diego	45
Gascuña, José M.	97	Vázquez, Diana M.	161
González, Pascual	33	Vázquez, Jesús	97
Herrera Alcántara, Oscar	33	Vázquez, Roberto A.	161
Herrera, Francisco	183, 193	Zapata, René	265
Hsu Sen, Chang	75	Zepeda, Claudia	255
Hsu Sen, Chiang	119, 139		
Iglesias, E. L.	129		
Jiménez Velasco, María Gpe.	129		
Jiménez, Antonio	233		
Jui Chi, Shen	3		
Junco Rey, Maria	119		
Kuri Morales, Angel	87		
León Fernández de Lara, Yazid	173, 183, 193		
Lluis de la Rosa, Josep	223		
López Herrera, Josefina	223		
Martínez Cuevas, Stivalis Anahi	55		
Mateos, Alfonso	55		
Méndez, J. R.	205		
Monroy, Raúl	3		
Montes Gonzalez, Fernando	129		
	97		
	213		

Editorial Board of the Volume

Journal of Interpersonal Violence

- Ayith Abraham
Jose Luis Aguirre
Juan Manuel Alhuacrin
Inés Arana
Gustavo Arroyo Figueroa
Victor Ayala Ramirez
Ruth Ayleit
Antonio Bahamonde
Soumya Banerjee
Olivia Barrón Cano
Ildar Batyrshin
Ricardo Beausoleil Delgado
Bedrich Benes
Ramón F. Brena
Carlos A. Brizuela
Paul Brna
Wolfram Burgard
Oswaldo Cairó
Nicoletta Calzolari
Francisco Canú Ortiz
Maria Carolina Monard
Oscar Castillo López
Edgar Chávez
Yuehui Chen
Carlos A. Coelho Coelho
Simon Colton
Santiago E. Conant Pablos
Ulises Cortés
Carlos Cotta Porras
Nareli Cruz Cortés
Nicandro Cruz Ramírez
Victor de la Cueva
Antonio D'Angelo
Louise Dennis
Alexandre Dikovsky
Juergen Dix
Marco Dorigo
Armin Friedler
Bob Fisher
Juan J. Flores
Olac Fuentes
Alexander Gelbukh (co Chair)
Eduardo Gómez Ramirez
- Andrés Gómez de Silva
Jose A. Gamez Martin
Matjaz Gams
Leonardo Garrido Luna
Luis Eduardo Garza Castañón
José Luis Gordillo
Crina Grosan
Neil Hernández Gress
Arturo Hernandez
Brahim Hinich
Jesse Hoey
Johan van Horebeek
Dieter Hutter
Pablo H. Ibaranguoytia G.
Bruno Jammes
Leo Joskowiez
Mario Köppen
Ingrid Kirschning
Zeynep Kiziltan
Ryszard Klempous
Angel Kuri Morales
Ramón López de Mantaras
Pedro Larrañaga
Christian Lemaitre León
Eugene Levner
Jim Little
Vladimir Matik
Jacek Malec
Toni Mancini
Pierre Marquis
Carlos Martín Vide
José Francisco Martínez Trinidad
Horacio Martínez Alfaro
Oscar Mayora
René Mayorga
Efrén Mezura Montes
Chilukuri K. Mohan
Raúl Monroy (co Chair)
Guillermo Morales Luna
Eduardo Morales Manzanares
Rafael Morales
Rafael Murrieta Cid
Juan Arturo Nolasco Flores

Additional Reviewers

Alfonso, A. de

Gabriela Ochoa Meier
Mauricio Osorio Galindo
Andrés Pérez Uribe
Manuel Palomar
Luis Alberto Pineda
André Ponce de Leon F. de Carvalho
David Poole
Bhanu Prasad
Jorge Adolfo Ramirez Uresti
Fernando Ramos
Carlos Alberto Reyes Garcia
Abdenour El Rhalhbi
Maria Cristina Riff
Roger Z. Rios
Dave Robertson
Horacio Rodriguez
Ricardo Rosati
Isaac Rudomin
Alessandro Saftiotti
Gildardo Sanchez
Alberto Sanfeliu Cortés
Andrea Schaerf
Thomas Schex

Leonid Sheremetov
Grigori Sidorov
Carlos Sierra
Alexander V. Sminov
Maarten van Someren
Juan Humberto Sossa Azuela
Rogelio Soto
Thomas Stuetzle
Luis Enrique Suarez Succar
Ricardo Swain Oropeza
Hugo Terashima
Dimitri Terzopoulos
Mannal Valenzuela
Juan Vargas
Felisa Verdejo
Mannal Vilares Ferro
Toby Walsh,
Alfredo Weitzenfeld
Nirmalie Wiratunga
Franz Wolawa
Kaori Yoshida
Claus Zinn
Berend Jan van der Zwaag

Juan C. Acosta Guadarrama
Héctor Gabriel Acosta Mesa
Teddy Alfaro
Miguel A. Alonso
Jose Ramon Arrazola
Stella Asinwwe
Severine Bérand
Fco. Mario Barcala Rodriguez
Axel Arturo Barcelo Aspetita
Adam D. Barker
Alejandra Barrera
Gustavo E. A. P. A. Batista
Abderrahim Benslimane
Arturo Bertones
Bastian Blankenburg
Passal Brisset
Andreas Bruening
Mark Buckley
Olivier Buffet
Diego Calvanese
Hiram Calvo
Niccolo Capanni
Carlos Castillo
Sutann Chakraborti
Carlos Chesñeyar
Federico Chesani
Wu Feng Chung
Murilo Coelho Naldi
Mark Collins
Jean François Condotta
Miguel Contreras
Sylvie Coste Marquis
Anne Cregan
Ronaldo Cristiano Prati
Juan A. Diaz
Victor Manuel Darriba Bilbao
Michael DeKluyar
Deepak Devicharan
Luca Di Gaspero
Marissa Diaz
Luigi Dragone
Edgar Dueñez
Mehmet Onder Efe

Arturo Espinosa Romero
Kati Faceli
Antonio Fernandez Caballero
Armin Fiedler
Alfredo Gabrielón
Arturo Galvan Rodriguez
Ariel Garcia
Cornae Gebuets
Karina Gilbert
Andrea Giovannucci
Fernando Godínez
Giorgi Goguaдзе
Miguel González
Jorge Graña
Federico Guedea
Alejandro Guerra Hernández,
Daniel Gunn
Iyerardo Gutiérrez
Christian Hahn
Eimmanuel Hebrard
Benjamin Hernández
Martin Honnik
Rodolfo Ibarra
Boyko Iliev
Bartosz Jablonski
Jean Yves Jaffray
Sylvain Jasson
Daniel Jolly
Narendra Jussien
Lars Karlsson
Ryszard Klempous
Jerzy Kotowski
A. Krizhanovskiy
Juan Carlos López Pimentel
David Lambert
Dario Landa Shiva
Jérôme Lang
Huet Diana Lee
Domenico Lembo
Paul Libberecht
Ana Carolina Lorena
Robert Lothian

Henryk Maciejewski
Fernando Magan Muñoz
Michael Maher
Donato Malerba
Salvador Mandujano
Ana Isabel Martínez García
Patrio Martínez Barco
Jared McInnis
Andreas Meier
Manuel Mejía Lavalle
Cortado Mencar
Thomas Meyer
Thomas Meyer
Link Milan
Monica Monachini
Rebecca Montanari
Andrés Montoya
Jaime Mora Vargas
José Andrés Moreno Pérez
Rafael Muñoz
Martin Muehlenbrock
Kahnhan Mukras
Amadeo Napoli
Ironzalo Navarro
Adeline Nazarenko
Juan Carlos Nieves
Peter Novak
Slawomir Nowaczyk
Oscar Olmedo Aguirre
Magdalena Ortiz de la Fuente
María Osorio
Joaquín Pacheco
Marco Patella
Jesus Peral
Mats Petter Pettersson
Steven Prestwich
Bernard Prun
José Miguel Puerta Callejón
Alonso Ramírez Manzanárez
Fernando Ramos
Orton Fausto Reyes Galaviz
Francisco Ribadas Peña
Fabrizio Riguzzi
Leandro Rodríguez Linares
Juan A. Rodríguez Aguilar
Raquel Ros
Maximiliano Saiz Noeda

S. Sandeep
P. Sanjivoon
Cipriano Santos
Vitaly Sechenin
Marvin Schiller
Przemyslaw Shwinski
Jasper Snook
Thamar Solerio
Claudia Soria
Eduardo J. Spinosa
Cyrill Stachniss
Ewa Sziachere
Armagan Tarim
Choh Man Teng
Paolo Torroni
Elio Tueli
Carsten Ullrich
L. Alfonso Ureña López
Diego Urbe
Mars Valiev
Maria Vargas Vera
Wamberto Vasconcelos
José Luis Vega
José Luis Vicedo
Jesus Vilares Ferro
Mario Villalobos Arias
Nic Wilson
Sean Wilson
Claudia Zepeda
Juergen Zimmer

Impreso en los Talleres Gráficos
de la Dirección de Publicaciones
del Instituto Politécnico Nacional
Tresguerras 27, Centro Histórico, México, D.F.
Noviembre de 2005.
Printing 500 / Edición 500 ejemplares.